


Painting & Weathering Cobblestone (Sett Stone) Sheets


This is how we weather our Cobblestone Interlocking Sheets.

1. Paint with a medium to light Polly Scale Grey
 - We used Polly Scale CSX Grey - Let Dry
2. Wash with Lite Mixture of Alcohol and India Ink
 - 1 Teaspoon Black Waterproof India Ink & 16oz of 91% Iso. Alcohol
 - We did two lite washes, let the first wash dry then apply a second coat.
3. Apply a wash of Bragdon's "Weathered Brown" weathering powder
 - (any dark brown powder) Let dry
4. Using the same Brown weathering powder wash, dab on the wash leaving different size spots all over the stones - Let Dry
5. Repeat Step 4 using Bragdon's "Grimy Grey" weathering powder
 - (any dark grey powder) - Let dry
6. Lightly blend with a large soft brush.
7. Spray entire area with Testors Dullcoat - Let dry
8. Using Bragdon's "Ash" weathering powder, apply a lite wash over the entire area - Let dry
 - (any light grey powder)
9. Lightly blend with a large soft brush.

You can then add stains by adding an A/I wash in little spots, or we prefer to apply a little water to the stones and let Polly Scale Oily Black wick into the water, causing a cool stain.

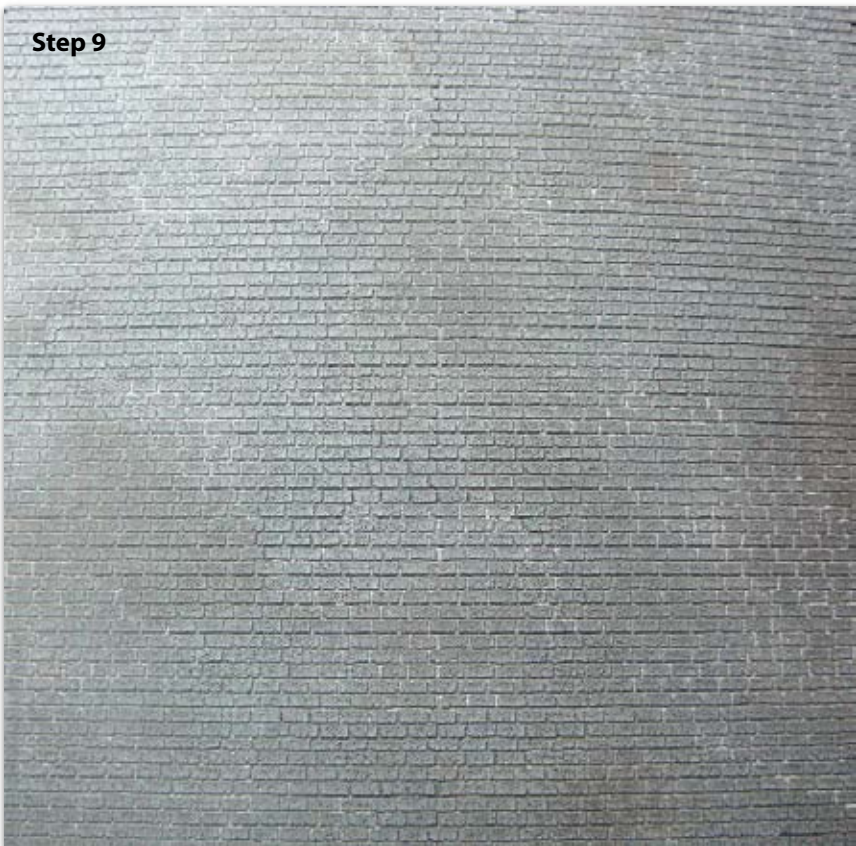

Step 1

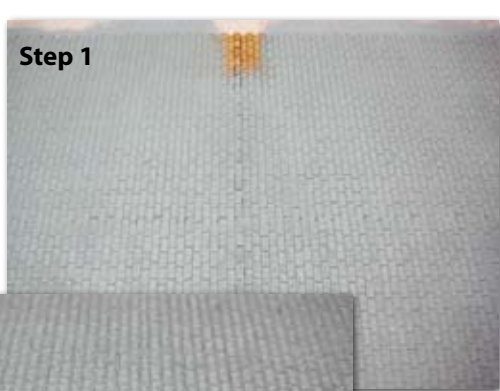

Step 2



Step 3



Step 4



Step 5



Step 6



Step 8

